

LA MEDITERRANEA VERSO IL 2030

Studi e ricerche sul patrimonio storico e sui paesaggi antropici, tra conservazione e rigenerazione



a cura di Marina Mistretta,
Bruno Mussari, Adolfo Santini

ArchistoR EXTRA



Tecnologie e materiali innovativi per infrastrutture di trasporto più sostenibili

Filippo Giammaria Praticò, Rosario Fedele, Paolo Giovanni Briante, Gianfranco Pellicano, Giuseppe Colicchio
filippo.pratico@unirc.it, rosario.fedele@unirc.it, paolo.briante@gmail.com, gia.pellicano@gmail.com, giuseppe.colicchio@unirc.it

Le tecnologie e i materiali innovativi possono favorire gli obiettivi contenuti nella risoluzione A/RES/70/1 delle Nazioni Unite. Le pavimentazioni stradali a bassa rumorosità (ad esempio le pavimentazioni porose, le miscele bituminose con gomma e le pavimentazioni con tessitura ottimizzata) hanno proprietà volumetriche, superficiali (quali drenabilità, tessitura, aderenza e prestazioni acustiche) e proprietà meccaniche che decadono nel tempo. Ciò dipende dalla particolare tecnologia utilizzata e da molteplici variabili. Molti processi e fenomeni sono coinvolti, con conseguenze in termini di sicurezza, rumorosità e budget. Alla luce di questi problemi, gli obiettivi di questo studio riguardano la messa a punto di una metodologia volta a migliorare la progettazione delle principali proprietà di una pavimentazione stradale e in particolare di quelle relative alla superficie. Le proprietà superficiali e volumetriche sono state monitorate, analizzate, in laboratorio e in situ. I risultati mostrano che l'uso di superfici stradali "speciali" (aventi, ad esempio, bassa emissione di rumore) può aumentare la durata complessiva della pavimentazione e che il metodo messo a punto può migliorare notevolmente la sostenibilità complessiva delle infrastrutture di trasporto, raggiungendo alcuni degli obiettivi indicati nella risoluzione A/RES/70/1.

THE MEDITERRANEA TOWARDS 2030
STUDIES AND RESEARCH ON HISTORICAL HERITAGE AND
ANTHROPIC LANDSCAPES, CONSERVATION AND REGENERATION

www.archistor.unirc.it

ArchistoR EXTRA 6 (2019)

ISSN 2384-8898

Supplemento di ArchistoR 12/2019

ISBN 978-88-85479-08-1

DOI: 10.14633/AHR198



Innovative Technologies and Materials for More Sustainable Transportation Infrastructures

Filippo Giammaria Praticò, Rosario Fedele, Paolo Giovanni Briante,
Gianfranco Pellicano, Giuseppe Colicchio

The United Nations Resolution, A/RES/70/1¹, 21 October 2015, adopted by the General Assembly on 25 September 2015, includes seventeen main “Sustainable Development Goals”. Furthermore, innovative technologies and materials for more sustainable transportation infrastructures include low-noise road pavements (for example porous asphalt concretes, asphalt rubberised mixtures, and texture-optimised pavements) and innovative technologies for the transportation infrastructures for the future. The above-mentioned innovations can lead to improvements by referring to the following A/RES/70/1 Goals (tab. 1).

Discussion of Several Prospective Developments

Hot mix asphalts (HMA) (including Open-Graded Friction Courses (OGFC), Stone Matrix Asphalt (SMA), and fine- and coarse graded dense mixes, etc.) are expected to perform over extended periods of time under a variety of traffic and environmental conditions, but their properties decay

1. UN GENERAL ASSEMBLY 2015.

A/RES/70/1 goals	Innovative technologies and materials contribution
Goal 3. Ensure healthy lives and promote well-being for all at all ages.	Reducing noise through porous asphalt concrete, and reducing Particulate Matters (PMs) through better pavements and vehicles.
<p>Goal 9. Build resilient infrastructure, promote inclusive and sustainable industrialization and foster innovation.</p> <p>Goal 11. Make cities and human settlements inclusive, safe, resilient and sustainable.</p> <p>Goal 12. Ensure sustainable consumption and production patterns.</p>	Reducing the consequences deriving from flash floods through high-permeable friction courses and improving the resilience of transportation infrastructures.
Goal 11. Make cities and human settlements inclusive, safe, resilient and sustainable.	Reducing vulnerability acting on the minimization of water runoff through high-permeable friction courses.
Goal 13. Take urgent action to combat climate change and its impacts.	Reducing the urban heat island effect through the use of permeable pavements.

Table 1. How Innovative technologies and materials match 2030 agenda United Nations A/RES/70/1 (Author's own compilation).

over time affecting safety, quietness, and budget². One of the possible solutions, the porous asphalt, was developed in 1967 in Great Britain to solve the hydroplaning problem. Porous pavements are used throughout the world, most commonly in Europe and the United States³. They are commonly referred to as Porous Asphalt (PA), Porous Concrete (PC), Open-Graded Friction Course (OGFC), or permeable friction course (PFC), and their performance is influenced by the high Air Void content

2. PRATICÒ, AMMENDOLA, MORO 2010.

3. CHARBENEAU, BARRET 2008.

(AV). Porous asphalt mixtures have an air voids content (18-24% for wearing layer, and 24-28% for bonding layer), which is greater than typical mineral-asphalt mixtures (3-8%)⁴. This result is obtained because of the aggregate gradation. This has many advantages and benefits such as improving the surface drainability and wet skid resistance, minimizing hydroplaning, reducing splash and spray, improving visibility (wet conditions) and, finally reducing noise levels between the tyre and the road surface⁵.

Reducing Noise and Particulate Matters (PMs) through Porous Asphalt Concretes

At a constant vehicle speed, quiet asphalt pavements contribute to reducing the noise of 3-6 dB compared to a conventional pavement (3 dB roughly corresponds to halving the traffic volume). For instance, Olszacki⁶ found that at a speed of 80 km/h, the noise from a passenger car on Hot Mix Asphalt (HMA) and Stone Mastic Asphalt (SMA) pavements was comparable (about 75 dB), while on porous asphalt it was about 70 dB, which is about 5 dB less. Low-noise road pavements can be obtained acting on: i) air void content (> 15%, reduction of air pumping mechanisms and air resonance, reduction of the horn effect, and resonance mechanisms); ii) thickness of the layers; iii) shape, interconnection and size of the air voids (related to maximum aggregates' size and degree of compaction).

The main disadvantage of porous pavement refers to the "clogging" effect due to sand and dust that obstruct the air voids⁷ and cause the long-term loss of sound absorption. Possible solutions are: 1) periodic cleaning; 2) the improvement of the mixture design (gradation); 3) the use of two-layer asphalt mixtures or gap-graded thin overlay. In the gap-graded thin overlay (15-25 mm), discontinuous gradation (gap-grade) aggregates guarantee the porosity necessary to properly convey water and dust⁸.

In recent decades, Asphalt Rubber (AR) has been proposed as a material for "silent" pavements. AR is a type of asphalt mixture containing rubber from recycled tires. AR can be produced using two methods: i) the "dry" method (rubber used as aggregates); ii) the "wet" method (rubber melted in the bitumen, a.k.a. asphalt rubber).

4. ANDRÈS-VALERI *ET ALII* 2016.

5. KOSHY, SACHDEVA, SREEDEVI 2015; BICHAJŁO, KOŁODZIEJ 2018.

6. OLSZACKI 2006.

7. TAN, FWA, HAN 2003.

8. CANESTRARI 2019.

Porosity-Elastic Road Surfaces (PERS) are made with rubber granules (40-95% by weight), mixed with a bituminous or synthetic binder, obtaining 25-40% of residual voids. PERS allow for the reduction of traffic noise because they are mechanically “elastic” and acoustically porous. Despite these advantages, some problems related to flammability and adhesion to the substrate have to be solved. Another example of a “quiet” material is the bituminous mixture containing expanded clay (i.e., a light and artificial aggregate in the form of spherical rough granules having a cellular type structure). The expanded clay is introduced as an aggregate with dosages of about 15% in weight, which produces a better sound absorption, a possible reduction of the vibrations, the improvement of the skid resistance because of a finer texture⁹, and the reduction of virgin resources.

Porous asphalt pavements are linked to environmental protection. They recharge groundwater and improve runoff water quality by significantly decreasing heavy metals, mineral oils, nutrients, and other soluble and anthropogenic pollutants¹⁰. It is important to note that the contact between the tyre and the road surface causes shears in the tyre¹¹ and this results in the generation of wear particles. The amount and size of the particles released depends on the climate (temperature), the composition and the structure of the tyre, the road surface, the driving speed and style, and the nature of the contact (e.g., rolling versus slipping). Among traffic-related particles, a part is generated from non-exhaust traffic related sources such as brake, tyre, and clutch. Road surface wear already exists in the environment as deposited material and becomes re-suspended due to traffic induced turbulence¹². On average, the Road Wear contribution to PM_{2.5} is about 45% (8.8 µg/m³) while it is about 54% (16.8 µg/m³) for PM10¹³.

The problems related to the PMs can be partly faced using the Permeable Friction Courses above (PFC)¹⁴. During storms, the rainfall infiltrates into a PFC pavement, it is filtered (especially suspended solids and other pollutants associated with particles), and it is conveyed along the boundary with the underlying conventional pavement to the edge of the road (the hard shoulder). To be more precise, filtering occurs when pollutants become attached to the PFC matrix by straining, collision, and other processes. Literature shows that concentrations of total suspended solids from PFC (i.e. total

9. MASAD *ET ALII* 2007; PRATICÒ, VAIANA 2015.

10. YAO, CHEN 2012.

11. KOLE *ET ALII* 2017.

12. GRIGORATOS, MARTINI 2014.

13. DENBY *ET ALII* 2013; AMATO *ET ALII* 2014; WEINBRUCH *ET ALII* 2014, PANKO *ET ALII* 2019.

14. ECK *ET ALII* 2012.

suspended solids (TSS), total Kjeldahl nitrogen (TKN), chemical oxygen demand (COD), and total metals like copper, lead, and zinc) are approximately 90% lower than in runoff from conventional pavements¹⁵.

Improving Resilience and Reducing the Consequences Deriving from Flash Floods through High-Permeable Friction Courses

Unbridled urbanization, demographic growth and climate changes have been identified as the main causes of the significant rise in flood event risk. Poorly maintained drains may concur to minimize the drainability of the infrastructures and produce, during storms, an instantaneous runoff and flash flooding¹⁶. Anyhow, in extreme weather events, traditional rainwater management systems and existing defence structures for flooding have been proven to be ineffective, and unable to mitigate the problem¹⁷.

In contrast, in terms of risk management, a certain resilience is requested. The latter is defined as a system's ability to continue to function at an acceptable level of efficiency in the face of disruptive or unexpected conditions. This means the ability for people to get around in the face of one or more major obstacles to normality. Indeed, these obstacles can include extreme weather events like the ones above.

To limit flash floods risks in developed areas (where the storm water risk is frequent) permeable pavement systems (PPS) can be used¹⁸.

Literature¹⁹ shows that the hydrological effects of permeable pavements on flood mitigation are highly dependent on pavement type, the clogging rate and the initial water content of the pavement. Permeable pavements reduce surface runoff by 1-40%, and peak flow by 7-43% in a 12-h storm event with rainfall of about 114 mm. Permeable friction courses can be applied also to low-traffic streets, driveways, patios, bike paths, parking lots, plazas and sidewalks, obtaining a decrease in the storm water runoff volume of up to 70-90%²⁰. The size of the air voids influences the lifespan of porous pavements. Oxidation and lower durability can be noted²¹.

15. BARRET, KEAFOTT, MALINA 2006.

16. ZAW HTOO OO 2018.

17. SAYAMA ET ALII 2012.

18. IMRANA, AKIBA, KARIM 2013.

19. HU ET ALII 2018.

20. CRUIJSEN 2015.

21. KUMAR DAS, DAS SAIKIA 2018.

Reducing Vulnerability Acting on the Minimization of Water Run Off through High Permeable Friction Course

Risk, resilience and vulnerability are interconnected. Vulnerability analysis refers to the susceptibility to extreme strains for a dynamic system²². It is noted that open-graded friction courses (PFC, OGFC, PAC) reduce vulnerability²³.

Reducing the Urban Heat Island (UHI) Effect through the Use of Permeable Pavements

The United States Environmental Protection Agency (US EPA) defines the Urban Heat Island (UHI) effect as «the phenomenon whereby urban regions experience warmer temperatures than their rural surroundings»²⁴. In fact, the replacement of land and vegetation (permeable and humid sites) with structures and infrastructures (impermeable and dry) leads to an increase in the sun's energy absorption and storage (i.e., the heat is transferred downwards and stored in the subsurface, then it is released during the night, affecting also the quality of the waterways).

For cities with one or more than one million people, this leads to the fact that the annual mean air temperature can be 1-3°C and 7-12°C warmer than the surroundings, during the day and the night, respectively. Furthermore, if the surface temperature of developed and rural areas is considered, the ranges above become 10-15°C and 5-10°C, respectively. It is important to note that, during the summertime: i) conventionally paved areas can reach 48–67°C; ii) an increase in 0.6°C leads to an increase in 1.5-2% of the peak urban electricity demand; iii) over recent decades, to compensate for the UHI effect, 5-10% of the community's demand for electricity is used.

Different approaches have been proposed to mitigate the UHI effect: the use of trees and vegetation, green and cool roofs and cool pavements (e.g., reflective or permeable pavements).

It is important to note that if pavement surface temperatures are reduced, in turn, it is possible to reduce the risk of rutting (premature depressions) due to heavy vehicles and to slow down the rate of aging that is responsible for other types of distress. Stempihar showed that porous asphalt has higher day-time surface temperatures than other pavements, but lower night-time temperatures

22. REGGIANI, NIJKAMP, LANZI 2015.

23. BARRET, KEAFOTT, MALINA 2006; COOLEY *ET ALII* 2009; BRAGA, CONNOLLY 2010.

24. UNITED STATES ENVIRONMENTAL PROTECTION AGENCY 2008.

compared to other materials with a similar or higher albedo²⁵. Mohajerani found that the UHI effect can be further mitigated if recycled materials are used to build these types of pavement²⁶. Ibrahim measured the highest temperature for traditional and porous asphalt concrete, and cement concrete, the results of which were equal to 47.3°C, 39.8°C, and 38.1°C, respectively²⁷. Liuproposed a novel permeable pavement called evaporation-enhancing permeable pavement. Their results showed that the proposed pavement is cooler than a conventional permeable pavement by as much as 9.4°C²⁸.

Methodology

The design of a multi-layered system, i.e. a pavement which aims at assessing geometry and the composition of each mixture²⁹.

There are many factors to be taken into consideration such as volume (e.g., AV³⁰), mechanics (e.g., fatigue, plastic deformation, thermal cracking), resistance (e.g., Marshall stability³¹), workability-related properties (e.g., bitumen viscosity), and (for the friction course) surface properties (e.g., friction, surface texture, acoustic absorption, drainability).

A synergetic and concurrent design is needed³², e.g.:

- 1) designing the friction course in order to comply with the CPX requirement (fig. 1);
- 2) predicting the corresponding consequences in terms of L_{den}^{33} ;
- 3) predicting the consequences, if any, in terms of the remaining surface-related properties (e.g., drainability, friction, and texture);
- 4) predicting the consequences in terms of mechanistic properties (fig. 1);
- 5) deriving the life expectancy for each layer of the pavement system;

25. STEMPIHAR *ET ALII* 2012.

26. MOHAJERANI, BAKARIC, JEFFREY-BAILEY 2017.

27. IBRAHIM *ET ALII* 2018.

28. LIU, LI, PENG 2018.

29. PLATÌ 2015; PRATICÒ, BRIANTE, LICITRA 2019.

30. PRATICÒ, MORO, AMMENDOLA 2009.

31. PRATICÒ, MORO, AMMENDOLA 2010.

32. GARBARINO *ET ALII* 2016.

33. EUROPEAN PARLIAMENT, COUNCIL OF THE EUROPEAN UNION 2002.

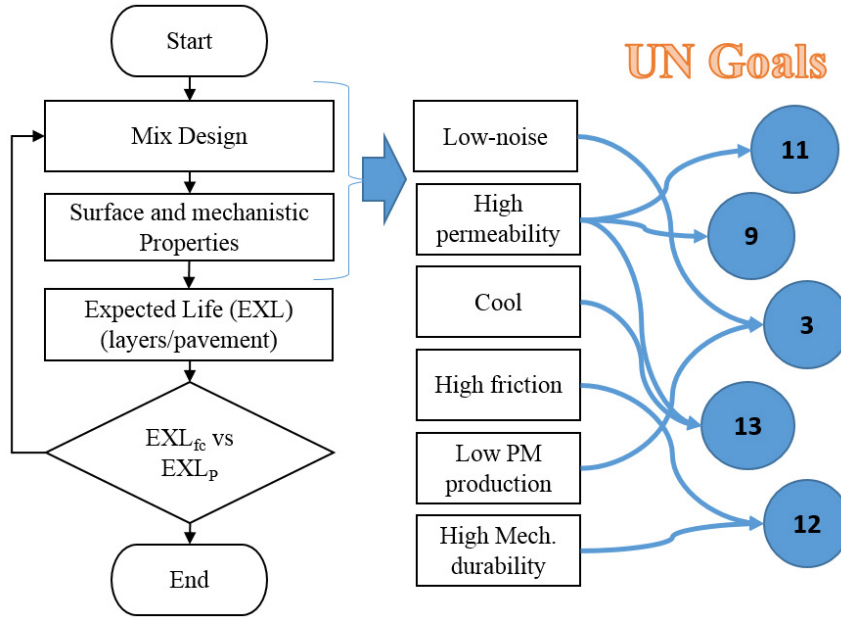


Figure 1. Methodology (Author's own compilation).

- 6) deriving the life expectancy of the pavement (without the friction course);
- 7) comparing the life expectancy of friction course and pavement;
- 8) going back to the design of layers (and, particularly, friction course) in order to have the highest life expectancy of the pavement, the highest life expectancy of the friction course, being the first n times the second one.

Conclusions

This paper aims at providing a methodology to set up innovative technologies for more sustainable transportation infrastructures.

A comparative table to show how these solutions can satisfy the 2030 agenda has been proposed. Finally, a methodology, which takes into account the main parameters associated with road pavement design, has been presented.

Bibliography

AMATO ET ALII 2014 - F. AMATO ET ALII, *Trends of road dust emissions contributions on ambient air particulate levels at rural, urban and industrial sites in southern Spain*, in «Atmospheric Chemistry and Physics», 2014, 14, pp. 3533–3544; <https://doi.org/10.5194/acp-14-3533-2014> (accessed 23 May 2019).

ANDRÈS-VALERI ET ALII 2016 - V. ANDRÈS-VALERI ET ALII, *Laboratory Assessment of the Infiltration Capacity Reduction in Clogged Porous Mixture Surfaces*, in «Sustainability», 2016, 8, pp. 1-11, <http://dx.doi.org/10.3390/su8080751> (accessed 23 May 2019).

BARRET, KEAFOTT, MALINA 2006 - M.E. BARRETT, P. KEARFOTT, J.F. MALINA, *Stormwater Quality Benefits of a Porous Friction Course and Its Effect on Pollutant Removal by Roadside Shoulders*, in «Water environment research: a research publication of the Water Environment Federation», 2006, 78, pp. 2177-2185; <http://dx.doi.org/10.2175/106143005X82217> (accessed 15 April 2019).

BICHAJŁO, KOŁODZIEJ 2018 - L. BICHAJŁO, K. KOŁODZIEJ, *Porous asphalt pavement for traffic noise reduction and pavement dewatering – the pollution problem*, in J. DZIOPAK, D. SLYS (eds), *Proceedings of the VI International Conference on Science and Technology*, INFRAEKO 2018 (Krakow, 7-8 June 2018), Curran Associates Inc., Krakow 2018, pp. 868-873.

BRAGA, CONNOLLY 2010 - A. BRAGA, C. CONNOLLY, *Introduction to Permeable Friction Course (PFC) Asphalt*, in S. STRUCK, K. LICHTEN (eds), *Proceedings of Low Impact Development International Conference (LID)*, (San Francisco, 11-14 April 2010), San Francisco, American society of Civil Engineers, Reston 2010, pp. 104-112.

CHEN, LEE, LIN - J.S. CHEN, C.T. LEE, Y.Y. LIN, *Influence of Engineering Properties of Porous Asphalt Concrete on Long-Term Performance*, in «Journal of Materials in Civil Engineering», 2017, 129, [https://doi.org/10.1061/\(ASCE\)MT.1943-5533.0001768](https://doi.org/10.1061/(ASCE)MT.1943-5533.0001768) (accessed 15 February 2019).

CANESTRARI 2019 - F. CANESTRARI, *Lezioni del corso di Gestione e Manutenzione delle Pavimentazioni Stradali, Tecnologie di riduzione del rumore*, Dipartimento ICEA, Sezione Infrastrutture, Università Politecnica delle Marche (Ancona), https://www.univpm.it/Entra//Ingegneria_1/docname/Allegati (accessed 27 August 2019).

CHARBENEAU, BARRET 2008 - R.J. CHARBENEAU, M.E. BARRETT, *Drainage hydraulics of permeable friction courses*, in «Water Resources Research», 2008, 44, pp. 1-10, <http://dx.doi.org/10.1029/2007WR006002> (accessed 17 September 2019).

COOLEY ET ALII 2009 - L.A. COOLEY ET ALII, *Construction and Maintenance Practices for Permeable Friction Courses*, National Academies of Sciences, Engineering, and Medicine, The National Academies Press, Washington DC 2009, <https://doi.org/10.17226/14310> (accessed 1 March 2019).

CRUIJSEN 2015 - A.C. CRUIJSEN, *Design opportunities for flash flood reduction by improving the quality of the living environment. A Hoboken City case study of environmental driven urban water management*, Master thesis, 26.03.2015, University of Technology, Delft (The Netherlands), <http://resolver.tudelft.nl/uuid:f433a5ce-8249-4976-a43f-a741b4ce2bf9> (accessed 27 August 2019).

DENBY ET ALII 2013 - B.R. DENBY ET ALII, *A coupled road dust and surface moisture model to predict non-exhaust road traffic induced particle emissions (NORTRIP). Part 1: Road dust loading and suspension modelling*, in «Atmospheric Environment», 2013, 77, pp. 283-300, <https://doi.org/10.1016/j.atmosenv.2013.04.069> (accessed 19 April 2019).

ECK ET ALII 2012 - B. ECK ET ALII, *Water Quality of Drainage from Permeable Friction Course*, in «Journal of Environmental Engineering», 2012, 138, pp. 174-181, [http://dx.doi.org/10.1061/\(ASCE\)EE.1943-7870.0000476](http://dx.doi.org/10.1061/(ASCE)EE.1943-7870.0000476) (accessed 25 May 2019).

EUROPEAN PARLIAMENT, COUNCIL OF THE EUROPEAN UNION 2002 - EUROPEAN PARLIAMENT, COUNCIL OF THE EUROPEAN UNION, *Directive 2002/49/EC of the European Parliament and of the Council of 25 June 2002 relating to the assessment and management of the Council of 25 June 2002 relating to the assessment and management of environmental noise -*

- PLATÌ 2015 - C. PLATÌ, *Sustainability factors in pavement materials, design, and preservation strategies: A literature review*, in «Construction and Buildings Materials», 2019, 211, pp. 539-555.
- PRATICÒ, AMMENDOLA, MORO 2010 - F.G. PRATICÒ, R. AMMENDOLA, A. MORO, *Factors affecting the environmental impact of pavement wear*, in «Transportation Research Part D: Transport and Environment», 2010, 8, pp. 127-133, <http://dx.doi.org/10.1016/j.trd.2009.12.002> (accessed 12 April 2019).
- PRATICÒ, BRIANTE, LICITRA 2019 - F.G. PRATICÒ, P.G. BRIANTE, G. LICITRA, *Durability of premium road surfaces*, in A. PEREZ-LOPEZ *ET ALII* (eds), *Proceedings of 48th International Congress and Exhibition on Noise Control Engineering, INTERNOISE 2019* (Madrid, 16-19 June 2019), Madrid 2019, http://www.sea-acustica.es/fileadmin//INTERNOISE_2019/Fchrs/Proceedings/1429.pdf (accessed 29 October 2019).
- PRATICÒ, MORO, AMMENDOLA 2009 - F.G. PRATICÒ, A. MORO, R. AMMENDOLA, *Modeling HMA bulk specific gravities: A theoretical and experimental investigation*, in «International Journal of Pavement Research and Technology», 2009, 173, pp. 115-122.
- PRATICÒ, MORO, AMMENDOLA 2010 - F.G. PRATICÒ, A. MORO, R. AMMENDOLA, *Potential of fire extinguisher powder as a filler in bituminous mixes*, in «Journal of Hazardous Materials», 2010, 173, pp. 605-613, <http://dx.doi.org/10.1016/j.jhazmat.2009.08.136> (accessed 15 May 2019).
- PRATICÒ, VAIANA 2015 - F.G. PRATICÒ, R. VAIANA, *A study on the relationship between mean texture depth and mean profile depth of asphalt pavements*, in «Construction and Buildings Materials», 2015, 101, pp. 72-79, <https://doi.org/10.1016/j.conbuildmat.2015.10.021> (accessed 19 March 2019).
- REGGIANI, NIJKAMP, LANZI 2015 - A. REGGIANI, P. NIJKAMP, D. LANZI, *Transport resilience and vulnerability: The role of connectivity*, in «Transportation Research Part A: Policy and Practice», 2015, 81, pp. 4-15, <https://doi.org/10.1016/j.tra.2014.12.012> (accessed 24 September 2019).
- SAYAMA *ET ALII* 2012 - T. SAYAMA *ET ALII*, *Rainfall-runoff-inundation analysis of the 2010 Pakistan flood in the Kabul River basin*, in «Hydrological Sciences Journal/ Journal Des Sciences Hydrologiques», 2012, 57, pp. 298-312, <http://dx.doi.org/10.1080/02626667.2011.644245> (accessed 16 March 2019).
- STEMPIHAR *ET ALII* 2012 - J.J. STEMPIHAR *ET ALII*, *Porous Asphalt Pavement Temperature Effects for Urban Heat Island Analysis*, in «Transportation Research Record: Journal of the Transportation Research Board», 2012, 2293, Issue1, pp. 123-130, <https://doi.org/10.3141/2293-15> (accessed 26 April 2019).
- TAN, FWA, HAN 2003 - S.A. TAN, T.F. FWA, C.T. HAN, *Clogging Evaluation of Permeable Bases*, in «Journal of Transportation Engineering», 2003, 129, [https://doi.org/10.1061/\(ASCE\)0733-947X\(2003\)129:3\(309\)](https://doi.org/10.1061/(ASCE)0733-947X(2003)129:3(309)) (accessed 15 June 2019).
- UN GENERAL ASSEMBLY 2015 - UN GENERAL ASSEMBLY, *Resolution Adopted by the General Assembly on 25 September 2015. A/RES/70/1, Transforming our world: the 2030 Agenda for Sustainable Development*, New York 2015, http://www.un.org/ga/search/view_doc.asp?symbol=A/RES/70/1&Lang=E (accessed 20 August 2019).
- UNITED STATES ENVIRONMENTAL PROTECTION AGENCY 2008 - U.S. ENVIRONMENTAL PROTECTION AGENCY (EPA), *Reducing urban heat islands: Compendium of strategies. Draft*, <https://www.epa.gov/heat-islands/heat-island-compendium> (accessed 12 August 2019).
- WEINBRUCH *ET ALII* 2014 - S. WEINBRUCH *ET ALII*, *A quantitative estimation of the exhaust, abrasion and resuspension components of particulate traffic emissions using electron microscopy*, in «Atmospheric Environment», 2014, 99, pp. 175-182, <https://doi.org/10.1016/j.atmosenv.2014.09.075> (accessed 18 March 2019).
- ZAW HTOO OO 2018 - T. ZAW HTOO OO, *Impact of Flash Floods, Taking Effective Long-Term Measures*, in «The Global New Light of Myanmar», 2 August 2018.